


Alarm Clock Wireless Charger User Manual

Model:SY-W0219

Functions: 15W fast wireless charging, temperature, Calendar, dual alarm clock, USB output.

Product photos

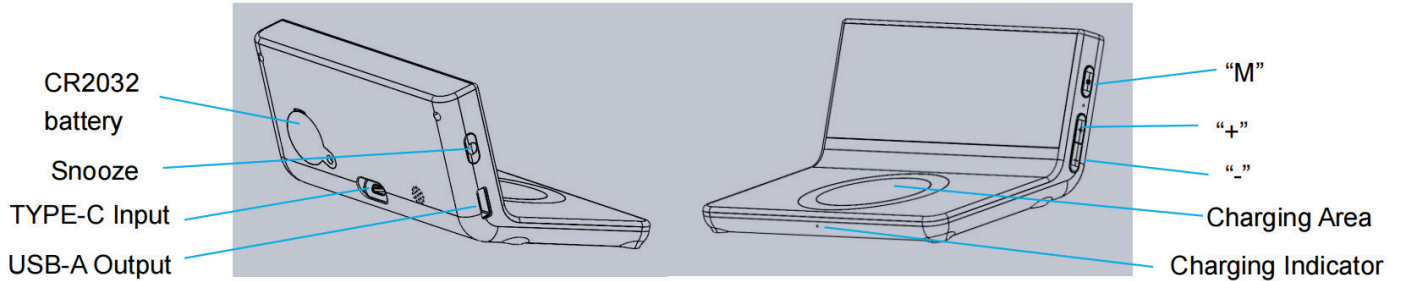

Power Connection

1. Plug the USB-A end of cable into the power adapter(QC3.0 or PD) while plug Type-C end into the product.
2. The product will be ready and stand by after all indicators are on.

Light Modes:

- Power Connected – Blue Blinks 1x
- Standby – Light Off
- Charging – Blue Light On
- Charged – Light Off
- FOD – Blue Light Flash

Button Functions

1. Buttons: "M", "Snooze", "+", "-"
2. Double press the "M" to set the 12-hour format or 24-hour format. The 12-hour system has AM and PM display. By default, the clock uses the 24-hour format.

Setting the Time:

1. Short press the "M" once to enter the time setting HOUR, the Hour starts to flash, short press "+/-" adjust the Hour value once, or long press "+/-" to continuously adjust the Hour value.
2. Short press the "M" once to enter the time setting MINUTE, the Minute starts to flash, short press "+/-" adjust the Minute value once, or long press "+/-" to continuously adjust the Minute value.

3. Short press the “M” once to finish the Time setting.

Setting the Alarm:

1. Long press the “+” to turn on or off the Alarm 1; Long press the “-” to turn on or off the Alarm 2.

When the alarm is turned on, the corresponding alarm indicator will light up.

2. Long press the “M” once to set the Hour of Alarm 1, the Hour starts to flash, press “+/-” adjust the Hour value.
3. Short press the “M” once to set the MINUTE of Alarm 1, the Minute starts to flash, press “+/-” adjust the Minute value.
4. Short press the “M” once to set the Hour of Alarm 2, the Hour starts to flash, press “+/-” adjust the Hour value.
5. Short press the “M” once to set the MINUTE of Alarm 2, the Minute starts to flash, press “+/-” adjust the Minute value.
6. Short press the “M” once to finish the Alarm setting.

Turn off Alarm or Snooze

1. The alarm sound is a buzzer. After the alarm rings, if nothing is done, it will automatically turn off after 3 minutes of ringing.
2. After the alarm rings, short press “+” to stop the day’s alarm of Alarm 1; short press “-” to stop the day’s alarm of Alarm 2. Long press “+” to turn off the Alarm 1; Long press “-” to turn off the Alarm 2.
3. Or after the alarm rings press “Snooze” button enter to snooze state. The alarm indicator flashes during the snooze. 5 mins per interval, no limited of snooze times.

Setting the Display brightness

The display has 4 levels brightness adjusted by manually.

Short press “+/-” to adjust the brightness, each press goes to the next setting: Max, Medium, Minimum, Off. By default, the display in Max brightness.

Setting the Calendar



1. Long press the “Snooze” once to enter the calendar setting YEAR, the Year starts to flash, press “+/-” adjust the Year value.
2. Short press the “Snooze” once to enter the calendar setting MONTH, the Month starts to flash, press “+/-” adjust the Month value.
3. Short press the “Snooze” once to enter the calendar setting DAY, the Day starts to flash, press “+/-” adjust the Day value. The week will adjust automatically according to the DAY.
4. In the standby mode, short press the “Snooze” to check the Calendar. It will automatically exit after 5 seconds.
5. Double press the “Snooze” to change the temperature from Celsius to Fahrenheit or from Fahrenheit to Celsius.

Power saving function

1. The built-in button battery is a time memory function.
2. Unplug the external power supply, all functions are invalid, and the functions return to normal when the power is turned on.

Wireless charging

1. Please confirm that your mobile phone is compatible with the wireless charging.
2. If the mobile phone has a metal case, please remove it before put the wireless charger on it.
3. Place a mobile phone compatible with a wireless charger directly on the charging area; try to place it in the center position to get the most efficient charging speed.



NOTICE:

1. **Attention: In order to function alarm, wireless charging and USB output work at same time, power shall be connected by a QC2.0 or QC3.0 power adapters. If connected by a 5V2A adapter, only wireless charging and alarm can work.**
2. Do not squeeze or collide.
3. Do not disassemble or put into the fire, water, to avoid short-circuit leakage.
4. Do not use wireless chargers in severe high temperature, humidity or corrosive environments to avoid leakage of damaged circuits.
5. Do not place too close to magnetic cards (ID cards, bank cards, etc.) with magnetic strips or chips to avoid magnetic card failure.
6. Keep more than 20cm between the implanted medical device (pacemaker, implantable cochlea, etc.) and the wireless charger to avoid potential disruption to medical devices.
7. Keep children from the product in case they play the wireless charger as a toy to avoid accidents.
8. Keep the wireless charger and receiver device away from water and other liquids.
9. To clean the charger, make sure the power supply is disconnected.
10. Usage temperature: 0-45°C.
11. Usage humidity: 20-85% (40°C)

* Pictures in this manual are all illustration. Final product is subject to fact.

* Inside package: alarm charger, charging cable, User Manual.

* Power adapter is not included. Please purchase or use phone original adapter, QC2.0 or 3.0 power adapter.

Product specification

Input: 5V/2A 9V/2.5A 12V/2A

Wireless Output: 15W (MAX)

USB-A output: 5V/1A(Max)

Charging efficiency: 73%

Charging distance: ≤8mm

Frequency: 110-205KHz

Size: 140*125*75mm

Applicable Devices

Products qualified with Qi standard.